

(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 142 746 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
10.10.2001 Bulletin 2001/41

(51) Int Cl.7: **B60K 31/18**, B62D 6/00
// (B62D101/00, 105:00,
111:00)

(21) Application number: **01108453.0**

(22) Date of filing: **04.04.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Longhi Alberto**
44100 Ferrara (IT)
• **Visconti Amedeo**
10138 Torino (IT)


(30) Priority: **04.04.2000 IT BO000190**

(74) Representative: **Cerbaro, Elena, Dr. et al**
STUDIO TORTA S.r.l.,
Via Viotti, 9
10121 Torino (IT)

(71) Applicant: **FERRARI S.p.A.**
41100 Modena (IT)

(54) Vehicle steering assembly

(57) A vehicle steering assembly (1) having a steering wheel (2), a steering box (3), and a steering arm (5) mechanically connecting the steering wheel (2) to the steering box (3); the steering assembly (1) being characterized by having means (8, 9, 10) for selectively imparting angular vibrations of given amplitude and frequency to the steering arm (5) to attenuate or eliminate the angular vibrations which, in particular driving conditions, are transmitted from the steering box (3) to the steering wheel (2) via the steering arm (5), and/or to transmit driver-perceptible angular vibrations to the steering wheel (2) to inform the driver of a given driving condition.

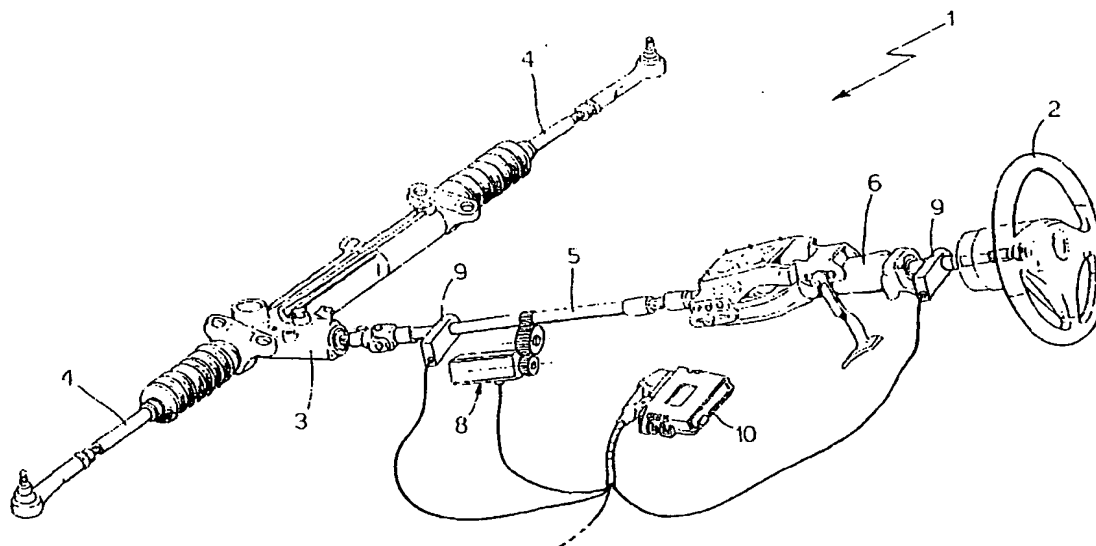

BEST AVAILABLE COPY

Description

[0001] The present invention relates to a vehicle steering assembly.

[0002] As is known, currently produced vehicle steering assemblies comprise a steering wheel, a steering box connected by links to the vehicle front suspension hubs, and a steering arm connecting the steering wheel mechanically to the steering box to enable the steering box to convert any angular displacement of the steering wheel into a corresponding rotation of the vehicle front suspension hubs.

[0003] To improve handling and comfort of the vehicle, most currently produced steering assemblies feature a hydraulic actuator built into the steering box and which, using the pressurized oil produced by a rotary pump powered by the vehicle engine, reduces the force exerted by the driver on the steering wheel to turn the front wheels of the vehicle.

[0004] In more advanced, steering assemblies, the assembly defined by the hydraulic actuator and rotary pump - known as hydraulic power steering - has been combined for some years now with an additional electric motor connected to the steering arm or directly to the steering box to regulate, as a function of speed, the force required of the driver on the steering wheel to turn the wheels of the vehicle.

[0005] Controlled by an electronic central control unit, the electric motor produces a torque varying in value and direction and which, added to the force produced by the hydraulic power steering system, regulates the force required of the driver on the steering wheel so as to increase the force required of the driver as vehicle speed increases.

[0006] Such a solution enables the hydraulic steering system to be so designed as to ensure an acceptable amount of effort at high vehicle speeds, while the electric motor is activated at low speeds to further reduce the force required of the driver on the steering wheel to turn the front wheels of the vehicle.

[0007] Though providing for easier, more precise handling of the vehicle, even the most sophisticated steering assemblies currently produced have the major drawback of transmitting to the steering wheel, over certain road surfaces, angular vibrations capable of seriously impairing inside-passenger-compartment comfort.

[0008] It is an object of the present invention to provide a vehicle steering assembly designed to eliminate the aforementioned drawback in a straightforward, low-cost manner.

[0009] According to the present invention, there is provided a vehicle steering assembly comprising a steering wheel, a steering box, and a steering arm mechanically connecting the steering wheel to said steering box; the steering assembly being characterized by comprising means for selectively imparting angular vibrations of given amplitude and frequency to the steering arm.

[0010] In a first preferred embodiment, the means for selectively imparting angular vibrations to the steering arm produce angular vibrations in phase opposition with, and in such a manner as to attenuate or eliminate, the angular oscillations which, in particular driving conditions, are transmitted from the steering box to the steering wheel via the steering arm.

[0011] In a further preferred embodiment, the means for selectively imparting angular vibrations to the steering arm produce, on command, angular vibrations of given amplitude and frequency, and which, on reaching the steering wheel, are perceptible by the driver; said means producing said vibrations under given driving conditions so as to alert the driver.

[0012] The present invention will be described with reference to the accompanying drawing, which shows, by way of example, a view in perspective, with parts removed for clarity, of a non-limiting embodiment.

[0013] Number 1 in the accompanying drawing indicates as a whole a vehicle steering assembly comprising a steering wheel 2; a steering box 3 connected by two links 4 to the vehicle front suspension hubs (not shown); and a steering arm 5 mechanically connecting steering wheel 2 to steering box 3 to enable the steering box to convert any angular displacement of the steering wheel into a corresponding rotation of the vehicle front suspension hubs.

[0014] Steering arm 5 is preferably, though not necessarily, divided into two or more portions connected by known mechanical joints; and at least one portion is mounted to rotate axially inside a sleeve 6 fixed to the vehicle frame. Sleeve 6 is an integral part of steering assembly 1, by supporting steering arm 5 and steering wheel 2 fixed to the end of arm 5, and is commonly known as the steering column.

[0015] Steering box 3 is of known type and preferably, though not necessarily, has an integrated hydraulic actuator (not shown) which, using the pressurized oil produced by a rotary pump (not shown) powered by the vehicle engine, reduces the force required of the driver on steering wheel 2 to turn the front wheels of the vehicle.

[0016] Steering assembly 1 also comprises means for selectively imparting angular vibrations of given amplitude and frequency to steering arm 5.

[0017] More specifically, in a first working condition, said means produce angular vibrations in phase opposition with, and in such a manner as to attenuate or eliminate, the angular oscillations which, in particular driving conditions, are transmitted from steering box 3 to steering wheel 2 via steering arm 5; and in a second working condition, the means selectively produce low amplitude, high-frequency angular vibrations, which, on reaching steering wheel 2, are readily perceptible by the driver, but with no impairment in the handling of the vehicle.

[0018] More specifically, in the second working condition, the means for selectively imparting angular vibrations to steering arm 5 transmit a train of angular vibrations of given amplitude and frequency to steering wheel

2 to alert the driver to given driving conditions, such as the maximum traction of the vehicle being reached, a set reference speed being exceeded, a given transverse acceleration being reached, etc.

[0019] With reference to the accompanying drawing, in the example shown, the means for selectively imparting angular vibrations to steering arm 5 comprise: an electric actuator 8 connected mechanically to steering arm 5; one or more sensors 9 for detecting, instant by instant, the angular displacement of steering arm 5 with respect to a given reference; and an electronic central control unit 10 for controlling electric actuator 8 as a function of the signals from sensors 9 and possibly other sensors on the vehicle.

[0020] More specifically, electronic central control unit 10 controls electric actuator 8 as a function of the signals from sensors 9 to impart to steering arm 5 angular vibrations capable of compensating, and so eliminating, the angular vibrations or oscillations which, in particular driving conditions, are transmitted from steering box 3 to steering wheel 2 via steering arm 5. In particular driving conditions, electronic central control unit 10 also, or alternatively, controls electric actuator 8 to impart to steering arm 5 low-amplitude, high-frequency angular vibrations, which, on reaching steering wheel 2, are readily perceptible by the driver, but with no impairment in the handling of the vehicle.

[0021] In the example shown, electric actuator 8 is defined by an electric step motor or similar, connected mechanically to steering arm 5 by cascade gears; and sensors 9 are defined by two known encoders fitted to steering arm 5, one close to the joint normally connecting steering arm 5 to steering box 3, and the other close to the other end of the arm supporting steering wheel 2.

[0022] It should be point out that, since electric actuator 8 does not have to produce particularly high torques-its function, in fact, being that of generating on the arm angular oscillations of, experimentally, fairly low amplitude - a compact, lightweight, low-power step electric motor is sufficient.

[0023] Also, if provided with a mathematical model of the behaviour of steering arm 5, electronic central control unit 10 can control electric actuator 8 on the basis of signals from even only one sensor 9 along steering arm 5.

[0024] In a variation not shown, electric actuator 8 is defined by an electric motor of the type normally used in electric or electrohydraulic hybrid power steering devices. In which case, in addition to eliminating the angular vibrations transmitted from steering box 3 to steering wheel 2 via steering arm 5 and/or transmitting low-amplitude, high-frequency vibrations to steering wheel 2, electric actuator 8, controlled by electronic central control unit 10, also acts as a conventional power steering device, be it electric or electrohydraulic. Obviously, using an electric motor of the type normally used in electric or electrohydraulic hybrid power steering devices, it is also possible to regulate, as a function of speed, the

force required of the driver on the steering wheel to turn the vehicle wheels.

[0025] Operation of steering assembly 1 is selfexplanatory.

[0026] The advantages of the assembly according to the present invention are obvious: firstly, it eliminates the angular vibrations or oscillations transmitted, in particular driving conditions, from steering box 3 to steering wheel 2 via steering arm 5, and which create serious problems for the driver; and, secondly, unlike currently used indicators on the instrument panel, it provides for alerting the driver of a given driving condition without distracting the driver's attention from the road.

[0027] Another advantage of steering assembly 1 is that the means for selectively imparting angular vibrations to steering arm 5 - i.e. electric actuator 8, the sensors, and electronic central control unit 10 - can be integrated easily, with no major structural alterations, into conventional steering assemblies with either electric or electrohydraulic power steering devices.

[0028] Clearly, changes may be made to steering assembly 1 as described and illustrated herein without, however, departing from the scope of the present invention. In particular, in an alternative embodiment of steering assembly 1, sensor/s 9 for detecting the position of steering arm 5 may be replaced with torque sensors for detecting, instant by instant, the torque transmitted via steering arm 5.

Claims

1. A vehicle steering assembly (1) comprising a steering wheel (2), a steering box (3), and a steering arm (5) mechanically connecting the steering wheel (2) to said steering box (3); the steering assembly (1) being **characterized by** comprising means (8, 9, 10) for selectively imparting angular vibrations of given amplitude and frequency to the steering arm (5).
2. A steering assembly as claimed in Claim 1, **characterized in that** said means (8, 9, 10) for selectively imparting angular vibrations of given amplitude and frequency to the steering arm (5) produce angular vibrations in phase opposition with, and in such a manner as to attenuate or eliminate, the angular oscillations which, in particular driving conditions, are transmitted from the steering box (3) to the steering wheel (2) via the steering arm (5).
3. A steering assembly as claimed in Claim 1 or 2, **characterized in that** said means (8, 9, 10) for selectively imparting angular vibrations to the steering arm (5) produce, on command, angular vibrations of given amplitude and frequency, and which, on reaching the steering wheel (2), are perceptible by the driver; said means (8, 9, 10) producing said vi-

brations under given driving conditions so as to alert the driver.


4. A steering assembly as claimed in Claim 2 or 3, **characterized in that** said means (8, 9, 10) for selectively imparting angular vibrations to the steering arm (5) comprise an electric actuator (8) connected mechanically to said steering arm (5); at least one sensor (9) connected to the steering arm (5); and an electronic central control unit (10) for controlling the electric actuator (8) as a function of signals from said at least one sensor (9).
5
10
5. A steering assembly as claimed in Claim 4, **characterized in that** said at least one sensor (9) detects, instant by instant, the angular displacement of the steering arm (5) with respect to a given reference.
15
6. A steering assembly as claimed in Claim 4, **characterized in that** said at least one sensor (9) detects, instant by instant, the torque transmitted via said steering arm (5).
20
7. A steering assembly as claimed in Claim 4, 5 or 6, **characterized in that** said electric actuator (8) is defined by an electric step motor or similar.
25
8. A steering assembly as claimed in Claim 4, 5 or 6, **characterized in that** said electric actuator (8) is defined by an electric motor of the type normally used in electric or electrohydraulic hybrid power steering devices; the electric actuator (8), under control of the electronic central control unit (10), reducing the force required of the driver on the steering wheel (2) to turn the wheels of the vehicle.
30
35
9. A steering assembly as claimed in any one of the foregoing Claims, **characterized in that** said steering box (3) has an integrated hydraulic actuator which, using a pressurized fluid, reduces the force required of the driver on the steering wheel (2) to turn the wheels of the vehicle.
40

45

50

55

THIS PAGE BLANK (USPTO)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 1 142 746 A3**

(12) **EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:
23.01.2002 Bulletin 2002/04

(51) Int Cl.7: **B60K 31/18, B62D 6/00**

(43) Date of publication A2:
10.10.2001 Bulletin 2001/41

(21) Application number: **01108453.0**

(22) Date of filing: **04.04.2001**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• **Longhi Alberto**
44100 Ferrara (IT)
• **Visconti Amedeo**
10138 Torino (IT)

(30) Priority: **04.04.2000 IT BO000190**


(74) Representative: **Cerbaro, Elena, Dr. et al**
STUDIO TORTA S.r.l., Via Viotti, 9
10121 Torino (IT)

(71) Applicant: **FERRARI S.p.A.**
41100 Modena (IT)

(54) **Vehicle steering assembly**

(57) A vehicle steering assembly (1) having a steering wheel (2), a steering box (3), and a steering arm (5) mechanically connecting the steering wheel (2) to the steering box (3); the steering assembly (1) being characterized by having means (8, 9, 10) for selectively imparting angular vibrations of given amplitude and frequency

to the steering arm (5) to attenuate or eliminate the angular vibrations which, in particular driving conditions, are transmitted from the steering box (3) to the steering wheel (2) via the steering arm (5), and/or to transmit driver-perceptible angular vibrations to the steering wheel (2) to inform the driver of a given driving condition.

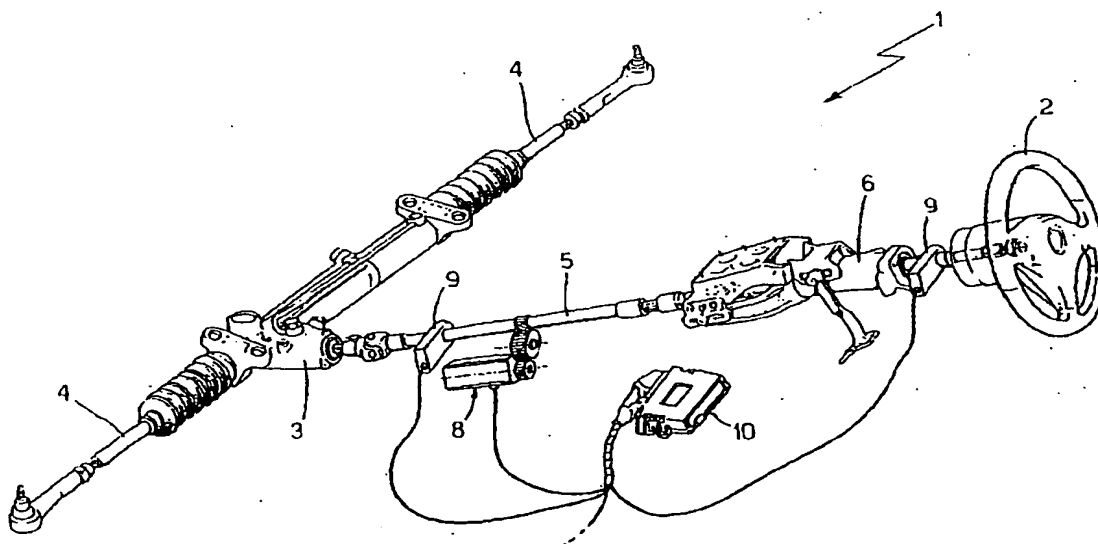

EP 1 142 746 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 10 8453

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	DE 197 49 587 C (DAIMLERBENZ ET AL.) 24 June 1999 (1999-06-24) * column 3, line 42 - line 54 * * column 4, line 7 - line 12 *	1,2,4,5	B60K31/18 B62D6/00
A	EP 0 943 526 A (DAIMLERCHRYSLER) 22 September 1999 (1999-09-22) * abstract *	1,2,4-6, 8	
X	US 5 271 475 A (TAKESHITA) 21 December 1993 (1993-12-21) * the whole document *	1,3-8	
X	US 5 925 082 A (SHIMIZU ET AL.) 20 July 1999 (1999-07-20) * abstract; figures 1,2,9 *	1,3-8	
X	EP 0 718 173 A (KOYO SEIKO) 26 June 1996 (1996-06-26) * column 6, line 56 - column 7, line 6; figure 2 *	1,3-8	
X	PATENT ABSTRACTS OF JAPAN vol. 1995, no. 11, 26 December 1995 (1995-12-26) - & JP 07 215144 A (MITSUBISHI), 15 August 1995 (1995-08-15) * abstract; figures 1,3 *	1,3,9	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B62D B60K B60R B60Q
A	EP 0 856 432 A (CRF) 5 August 1998 (1998-08-05)		
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 5 December 2001	Examiner Krieger, P
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPC FORM 1509 03 02 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 10 8453

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-12-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 19749587 C	24-06-1999	DE 19749587 C1	24-06-1999
		US 6150733 A	21-11-2000
EP 943526 A	22-09-1999	DE 19812236 A1	23-09-1999
		BR 9902446 A	22-02-2000
		EP 0943526 A2	22-09-1999
		JP 11334629 A	07-12-1999
		US 6205382 B1	20-03-2001
US 5271475 A	21-12-1993	NONE	
US 5925082 A	20-07-1999	JP 9216567 A	19-08-1997
		DE 19702383 A1	14-08-1997
EP 718173 A	26-06-1996	JP 8175413 A	09-07-1996
		EP 0718173 A2	26-06-1996
		US 5667033 A	16-09-1997
JP 07215144 A	15-08-1995	JP 3173269 B2	04-06-2001
EP 856432 A	05-08-1998	IT T0970071 A1	31-07-1998
		EP 0856432 A2	05-08-1998

EPC FORM P0339

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)